

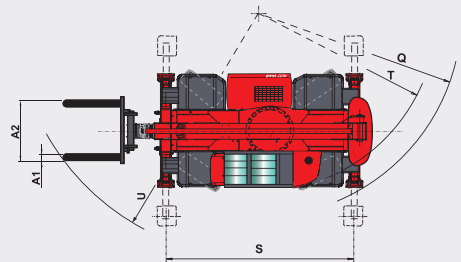


MRT EASY

	MRT 1440	MRT 1640	MRT 1840
Lifting capacity (on stabilizers) at 500 mm from forks heels	4000 kg		
Lifting height	13.80 m	15.80 m	17.90 m
Tyres	400/70 - 20 14 PR		
Forks (mm) Length x width x thickness	1200 x 125 x 50		
Braking			
Service brake	multiple-disc brakes hydraulically assisted on front axles		
Parking brake	negative		
PERKINS STAGE III B	854E-E34TA		
Capacity	4 cyl. - 3400 cm ³		
Power	102 HP/75 kW		
Max. torque	420 Nm - 1400 rpm		
Injection	direct		
Cooling	water		
Transmission	hydrostatic with automatic power regulation (variable displacement pump and motor) with control inching		
Reversing shift	electromagnetic		
Number of gears (forward/reverse)	2/2		
Max. travel speed	32 kph		
Rear axle	automatic rear axle locking system at a rotation		
4 stabilizers	simultaneous or individually controlled		
Rotation through 400° (Optional 360° continuous rotation)	turret mounted on a double slew ring slewing system with negative brake		
Hydraulics			
2 pumps gear type	115 l/min - 270 bar		
Control	2 electro proportional control joysticks for all hydraulic movements		
Capacities			
Cooling system	25 l		
Engine oil	8.10 l		
Hydraulic oil	150 l		
Fuel tank	130 l		
Unladen weight (with forks)	12490 kg	13000 kg	13300 kg
Width overall	2.40 m		
Height overall	2.97 m		
Length (forks carriage)	5.35 m	6.36 m	5.54 m
Ground clearance	0.34 m		
Drawbar pull	8600 daN		
Noise and vibration			
Noise at driving position (LpA)	79.7 dB		
Environmental noise (LwA)	104 dB		
Vibration to whole hand/arm	< 2.5 m/s ²		
Safety	standard load moment indicator (mobile crane standards)		



mm	MRT 1440	MRT 1640	MRT 1840
A		1200	
A1		125	
A2		1320	
A3		50	
B		290	
C	5060	6075	5255
D		4350	
E		1015	
F		2320	
G		1015	
H		340	
I		2375	
J		2970	
K	2040		2485
M		2400	
O		3975	
P		160	
Q		3900	
S		4000	
T		3600	
U	5250	5520	5235
V		950	
Y		12°	
Z		105°	

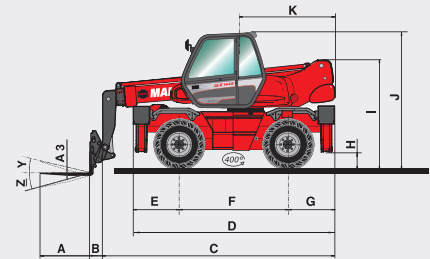


MRT 1840


Crane //




**Rotation on stabilizers
with forks**

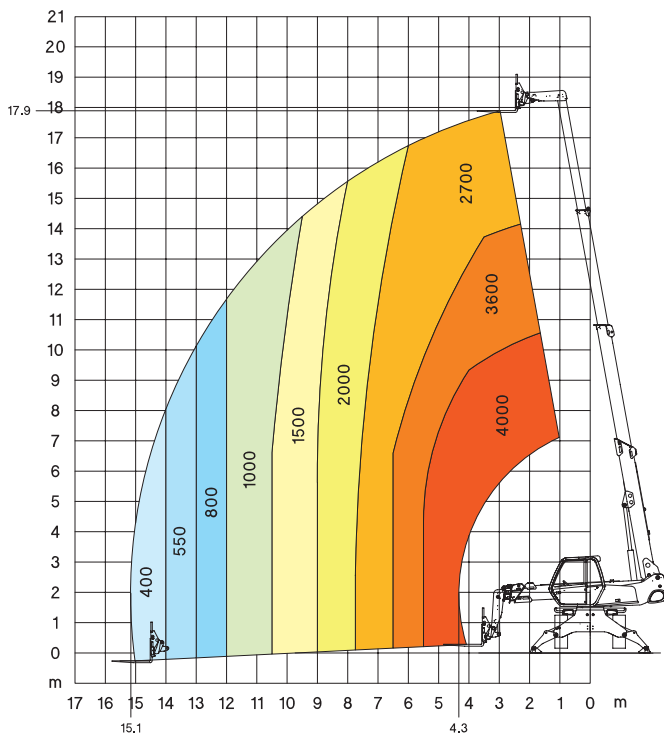


**Frontal on tyre
with forks**

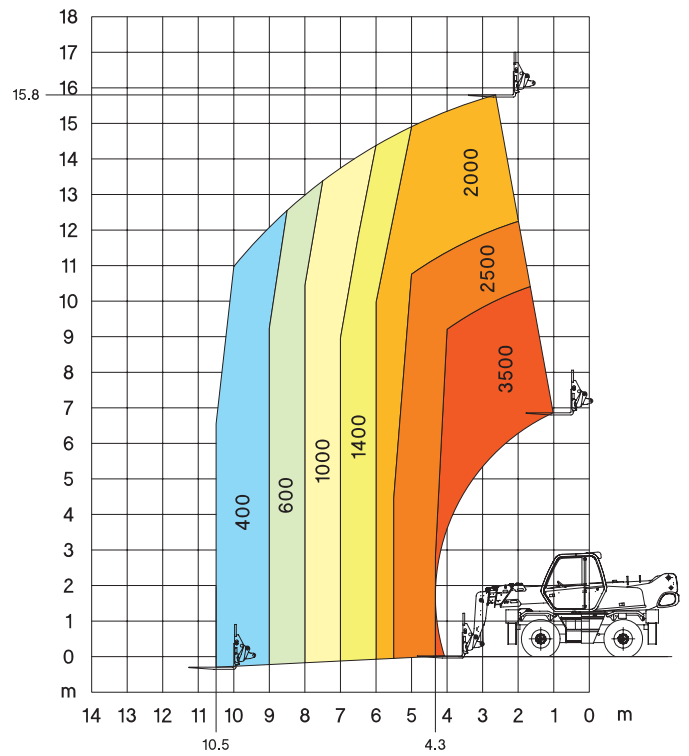


Telehandler // Platform

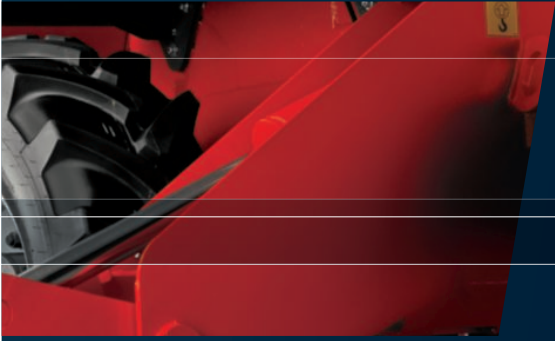

Rotation on stabilizers
with **4000 kg** winch

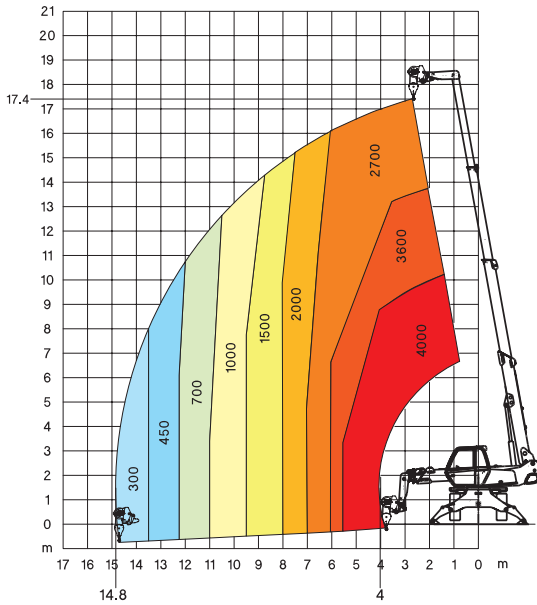


Rotation on stabilizers
with **1500 kg** jib

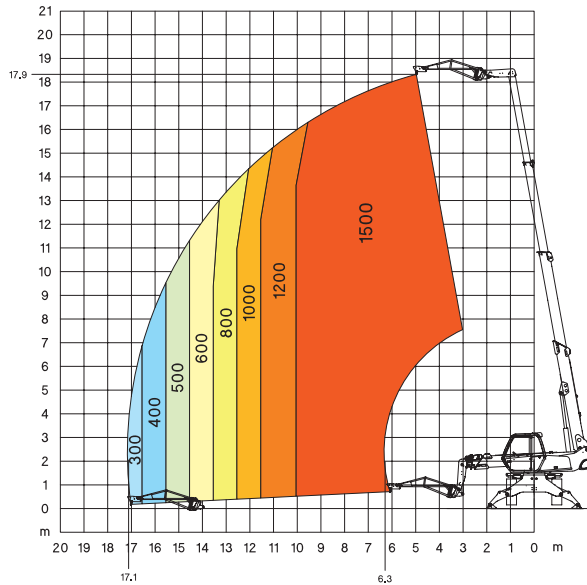


Rotation on stabilizers
with **365/1000 kg platform**
2.25 / 4 m - 3 persons

Platform 365 kg and 1000 kg

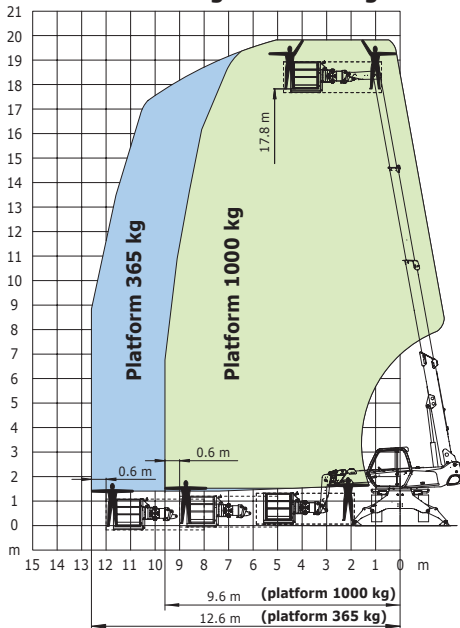

Rotation on stabilizers
with **Aerial platform jib 2**
200 kg - 2 persons

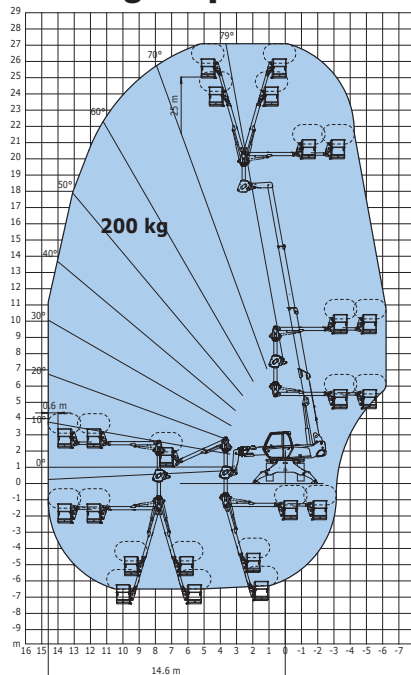

WRT 1840

FT071EN_A_0613_MRTEASY



TVH EQUIPMENT NV · HEAD OFFICE WAREGEM

Brabantstraat 15 · 8790 Waregem · Belgium

T +32 56 43 42 11 · F +32 56 43 43 45 · waregem@tvh.com · www.tvhequipment.com

A company of **TVH**